



CER (Supporting outer wall)

Customised solutions

Double wall, insulated selfsupporting chimney with supporting outer wall

Technical features

Materials and thicknesses

Inner wall:

Corten steel (minimum S235JRW)

Stainless Steel AISI 304 (1.4301)

AISI 316L Stainless Steel (1.4404)

Outer wall:

Carbon steel (S235JR)

Corten steel (S235JRW)

Insulation:

High density rock wool

External finish:

Stainless steel AISI 304 BA (1.4301)

Stainless steel AISI 316L BA (1.4404)


Lacquered according to RAL colours according to EN ISO 12944

For other finishes, please contact Dinak

Certifications



 **Assembly**

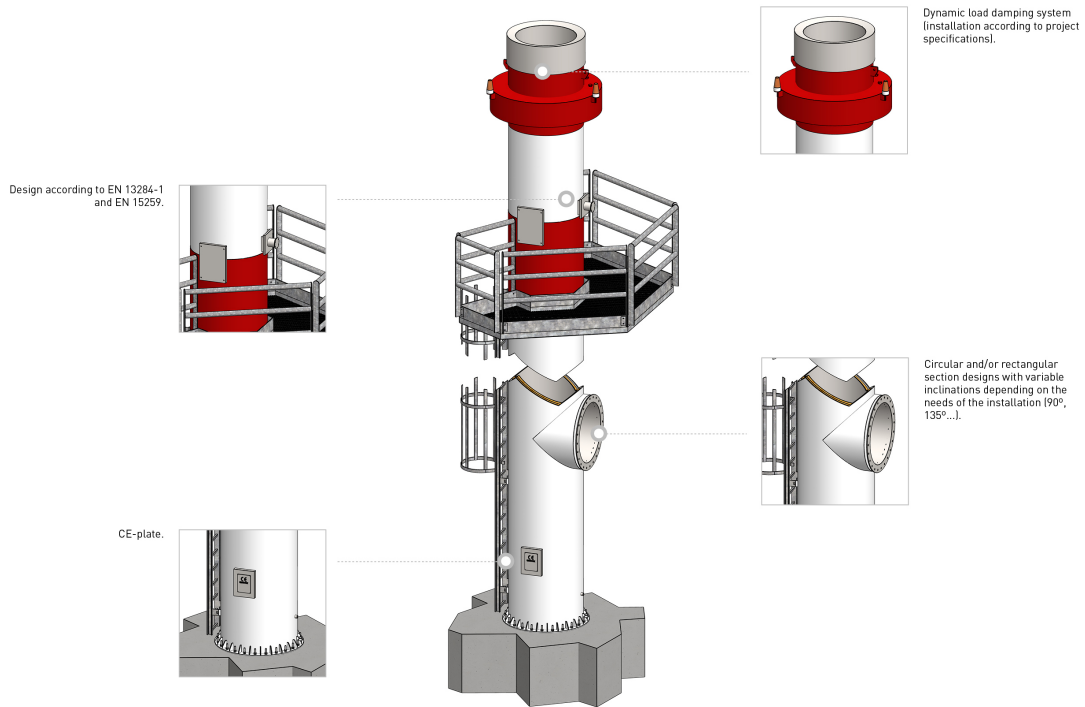

Do you want more information about **CER (Supporting outer wall)**?

Contact us

uk@dinak.com

(+44) 0121 272 4830