



SW

Single wall stainless steel modular chimney with optional seal

Benefits

Versatility

The SW range is a duct that adapts to all situations such as sealed boilers, condensing boilers, living room fireplaces, ventilation and kitchen extractor hoods

Safety-End

All parts have a safety-end making it completely safe to handle the parts during assembly

Easy clip system

The SW range can be assembled without the need for a joint clamp up to 3 m maximum thanks to its quick clip system

Technical features

Generic

Overlap: 50 mm

Temperature classes

Without seal: Up to 600°C (T600)

With seal: Up to 200°C (T200)

Diameters

| | | | | | |
|-----|-----|-----|-----|-----|-----|
| 80 | 100 | 110 | 120 | 125 | 130 |
| 140 | 150 | 160 | 175 | 180 | 200 |
| 250 | 300 | 350 | 400 | 450 | 500 |
| 550 | 600 | 650 | 700 | 750 | 800 |

Materials and thicknesses

Stainless steel AISI 304 (1.4301) or AISI 316L (1.4404)

Thicknesses:

0.4 mm in diameters from Ø80 to 300 mm

0.5 mm in diameters from Ø350 to 450 mm

0,6 mm in diameters from Ø500 to 600 mm

0.8 mm in diameters from Ø650 to 800 mm

Optional painting (R.A.L. range)

Sealing classes

Without seal: N1 (up to 40 Pa in natural draught)


With seal: P1 (up to 200 Pa overpressure)

 **Certifications**




 **Assembly**

The innovative safety-end finish on the edges of pieces ensures safe handling while enhancing their mechanical robustness.

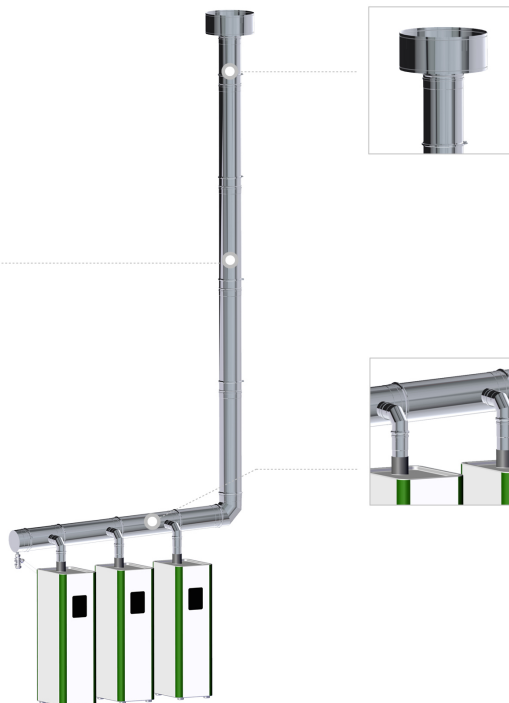

A wide selection of terminals designed to suit different applications.



Wide range of pieces for adapting to different types of installations: centralised boilers, cascade boilers, ventilations, kitchen extractor hoods, etc

Do you want more information about **SW**?

Contact us

uk@dinak.com

[\(+44\) 0121 272 4830](tel:+441212724830)